



## PU INSULATOR PREMIUM WOOD FINISHES

**Wood Amore PU insulator** helps to enhance actual colour of the wood and can be used on interior wooden surfaces.

### PRODUCT BENEFITS/FEATURES



Excellent insulating properties



Fast drying




Suitable for interior surfaces

### AREAS OF APPLICATION

• Plywood • MDF and Veneer

### PACKAGING AVAILABLE

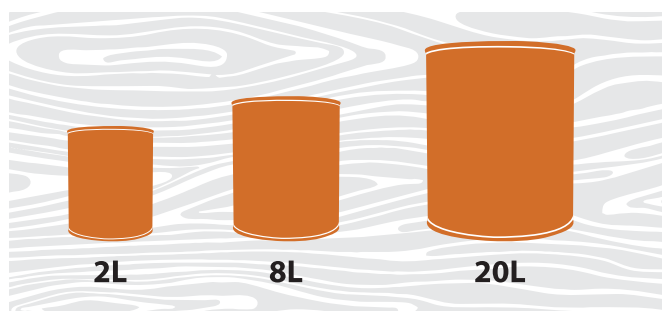

### COVERAGE



\*Actual coverage may vary from the quoted coverage due to factors such as method and conditions of application, surface roughness and porosity.

### HOW TO APPLY



**STEP 1:** Apply the first coat of Wood Amore PU insulator.



**STEP 2:** Leave the surface to dry.



**STEP 3:** Apply the second coat of Wood Amore PU insulator.



**STEP 4:** Apply Wood Amore PU Clear Sealer/White Filler (clear/white).

### POST PAINTING CARE

For removing stains on tiles and metal surfaces, apply NC Thinner on the surface and wipe clean. If stains are difficult to remove, scrapping can be done after applying NC thinner on the stained area. Precautions need to be taken while spraying / brushing, like masking of adjoining areas with suitable material, as the stains may be difficult to remove if present on wood or coated wooden and wall surfaces.

## PRODUCT INFORMATION

**Mixing ratio-** 1:1 by Vol (Resin + Hardener)

**Thinner-** NA

**Thinner Intake-** NA

**Number of coats-** 1-2 coats

**Dust free time-** 4 - 5 min

**Handling time-** 30- 35min.

**Gun Nozzle-** 1.4-1.6mm

**Gun pressure-** 2.2- 2.8 kgs/sq.cm

**Weather-** 30°C and 75% relative humidity

## PRECAUTIONS

For optimum performance, use Wood Amore PU Insulator in following ways:

1. Wood Amore PU topcoats must be applied at a temperature between 20°C and 40°C and humidity not above 75%.
2. Do not over-thin and mix according to recommended ratios.
3. Stir well and strain before use.

## SAFETY FEATURES

- Store the product at ambient conditions in well ventilated locations and away from source of ignition and fire.
- Use protective equipment like rubber/polyurethane gloves, safety goggles/glasses, face mask while handling the paint.
- Avoid eye and skin contact. In both cases wash with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not inhale or ingest. In case of inhalation move to fresh air and seek medical attention if symptoms persist in both cases.
- Dispose in land filling. Do not dispose in any drain or landfill.
- No added Lead, Mercury or Chromium compounds.