




## AB SAJAO FLOOR KO, PAINT LAGAO FLOORPRO





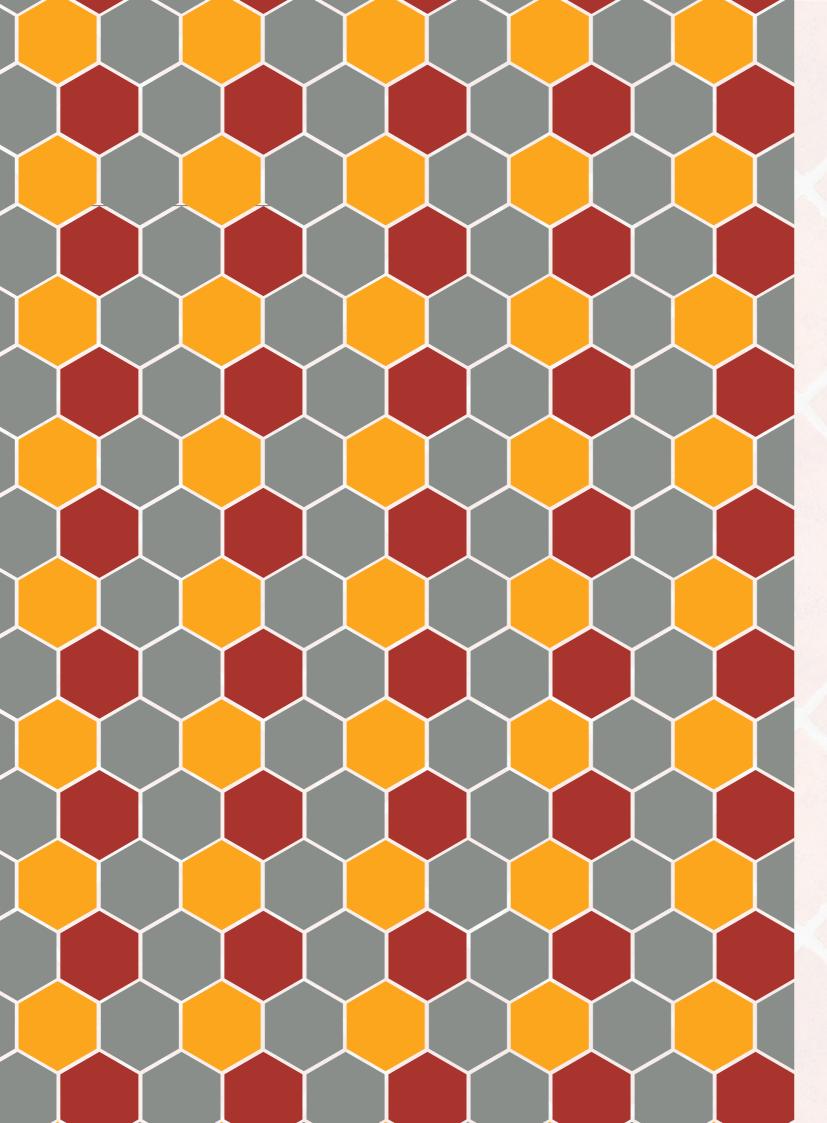



# Redefining Exteriors with Colour

JK Armour FloorPro is a water based acrylic emulsion exclusively designed to protect interlock tiles, cement surfaces, walkways, driveways and terrace floors.







SOFT SHEEN



SUPERIOR ADHESION




HIGH WASHABILITY

## **BLOSSOM BOUQUET**

Delicate and charming, reminiscent of a bouquet of blooming flowers.





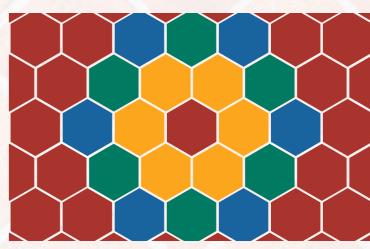





**Paver Grey** 




## TROPICAL TANGO

Vibrant and exotic, capturing the lively rhythm of a tropical dance





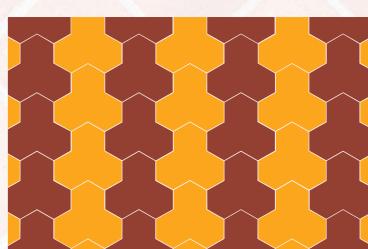






#### **ENIGMA ENSEMBLE**

Intriguing and enigmatic, inviting exploration and discovery





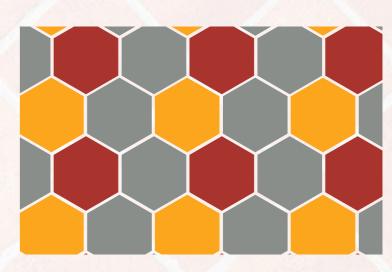





**Paver Grey** 




#### SUNSET SYMPHONY

Warm and inviting, with hues that mimic the vibrant colors of a setting sun





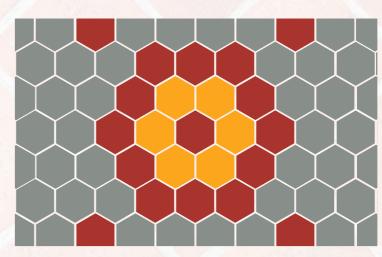






**Paver Grey** 




#### **URBAN MAZE**

Reflecting the complexity and vitality of city life, with twists and turns that captivate the eye.



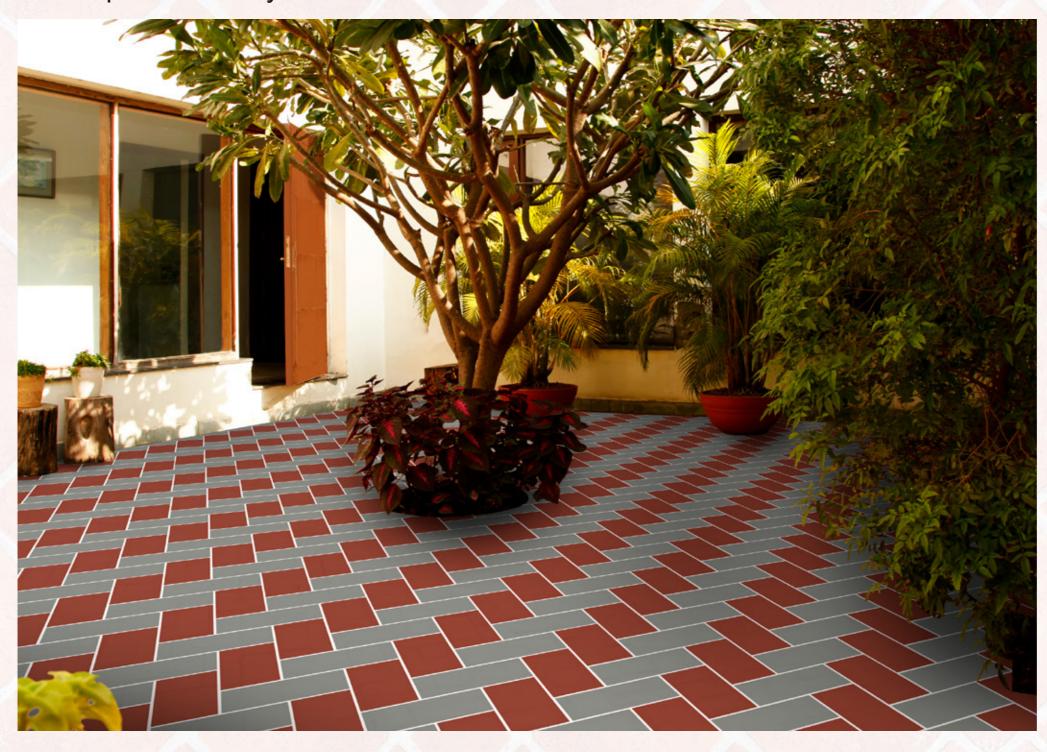

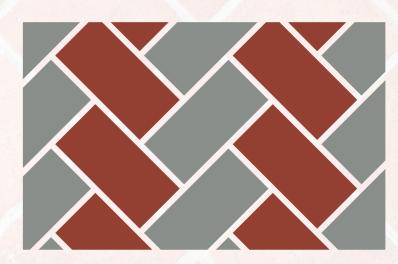







**Paver Grey** 

## **COSMIC WEAVE**

Bold and modern, evoking the energy of celestial pathways



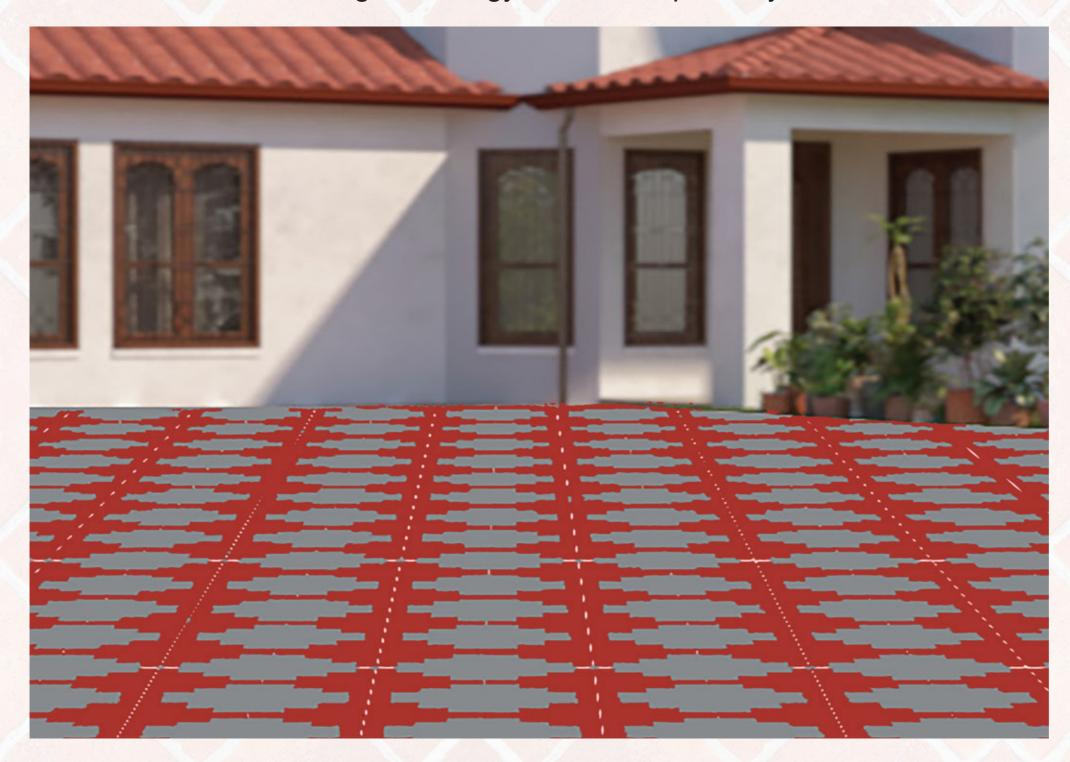

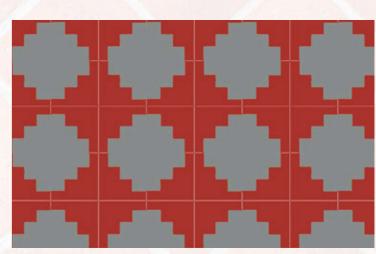







**Paver Grey** 

#### DIAMOND MIRAGE

Geometric elegance that creates an illusion of depth and dimension



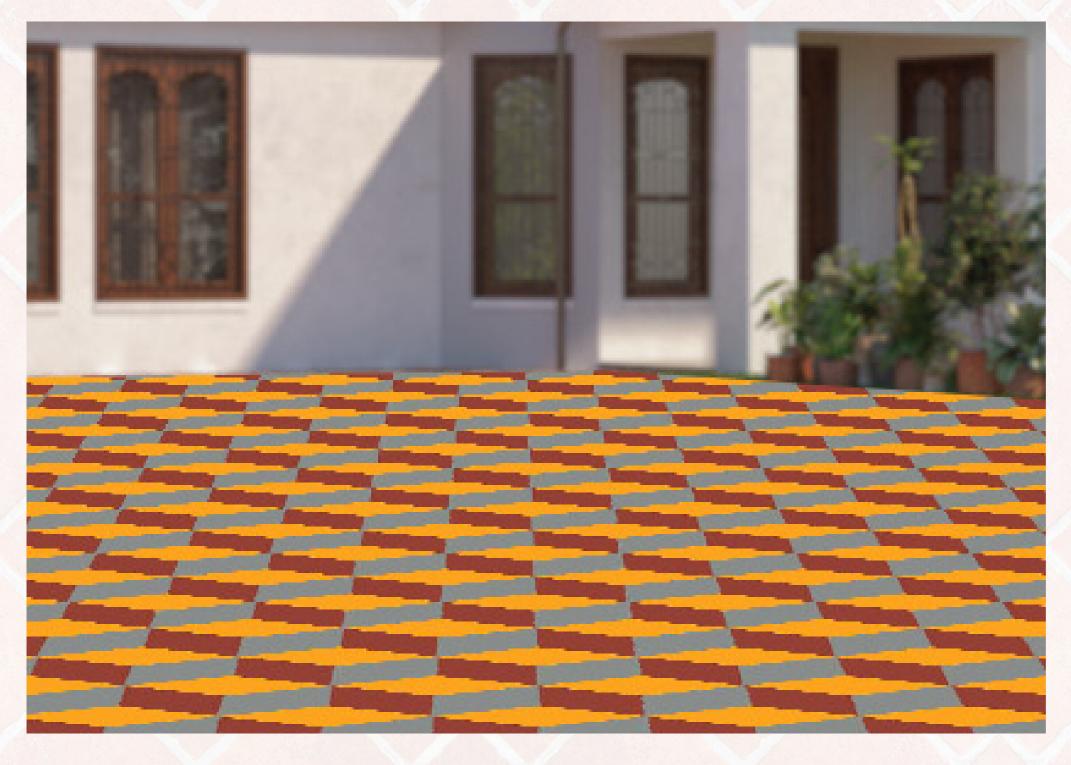

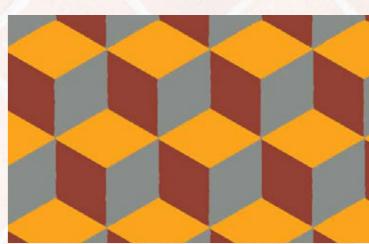



Signal Red




## **CELESTIAL PATH**

Tranquil and minimalist, invoking the simplicity and serenity of a heavenly garden





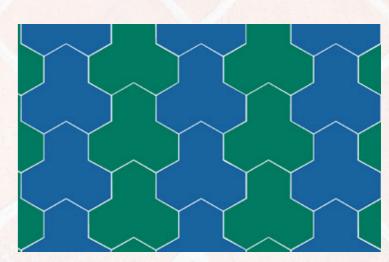







**Peacock Blue** 

#### **EMERALD DREAM**

A soothing and rejuvenating pattern inspired by the tranquil beauty of lush green landscapes and serene natural surroundings.



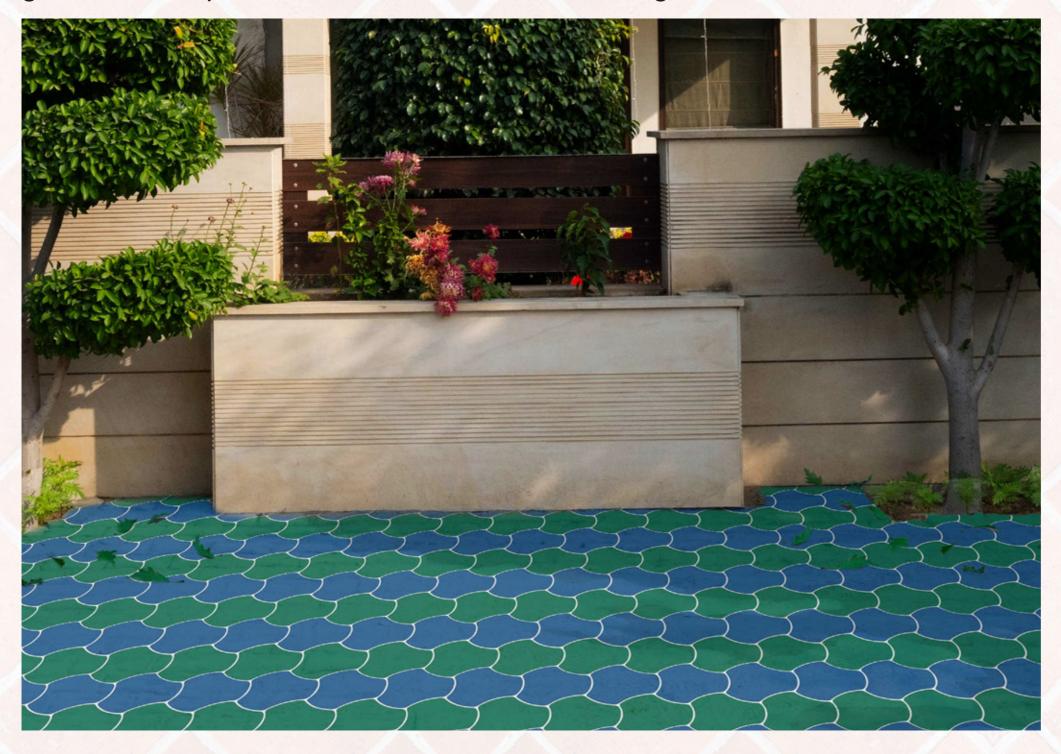

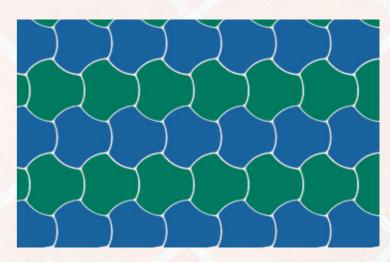






## **ELECTRIC ELEGANCE**

Bold and vibrant, with electrifying colors that add a touch of sophistication to any space.





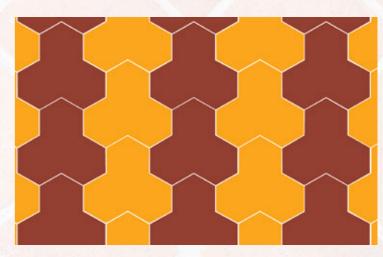







## SERENE SPIRAL

A tranquil and mesmerizing pattern inspired by the harmony of spirals found in nature.



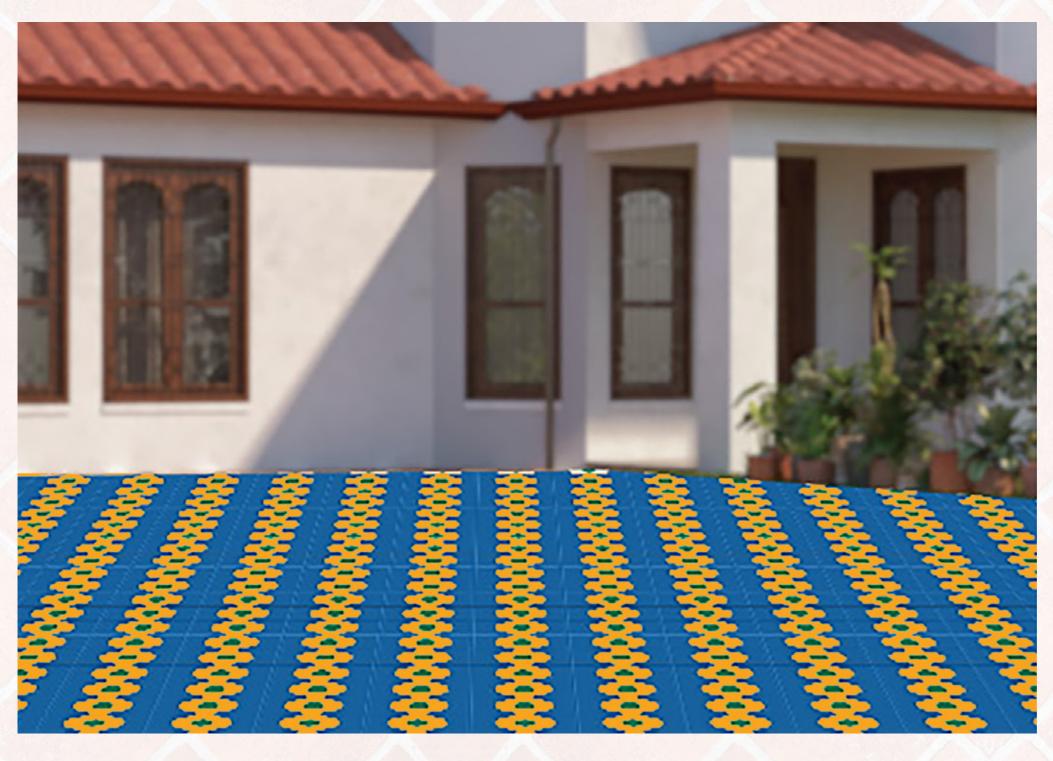

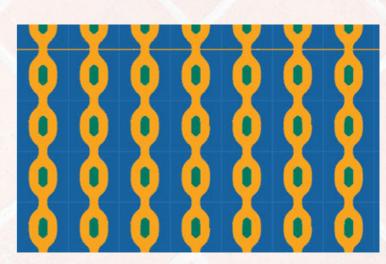





Peacock Blue



#### SURFACE PREPARATION

Freshly plastered/concrete surfaces must be allowed to cure completely for at least 12 weeks. Ensure surface is thoroughly clean, dry and free from all loose dirt, chalk, grease or oily material, laitance, organic debris, fungi, algae and flaking paint by brushing with a wire/stiff coir brush or power tool cleaning followed by water jetting if required and appropriate surface cleaners. For repainting surfaces ensure all the old coating should be removed, any cracks or crevices present should be filled with suitable filling compounds/cement sand mixture, any seepage/dampness issue needs to be arrested appropriately before application. After cleaning, sand the surface to remove any smoothness or glossy areas using wire brush or power tool sanding. Wash with fresh water and allow the surface to dry.

#### **SELF-PRIMING COAT**

Apply a self-priming coat of JK Armour FloorPro to the prepared surface by diluting with 30-40% clean water and allow it to dry for minimum 5-6 hours.

#### TOP COAT

Apply 2 coats of JK Armour FloorPro with maximum of 10% dilution over the self-priming coat and allow a drying time of 5-6 hours between the coats. Curing after 72 hours of application (low traffic).

JK Cement Ltd., Kamla Tower, Kanpur, UP-208001 | Email: consumercare@jkmaxxpaints.com

Toll-free No.: 1800 203 4555 | www.jkmaxxpaints.com

