


INTRODUCING  
**JK ARMOUR**  
**FLOORPRO**  
Floor Coat Emulsion

AB SAJAO FLOOR KO,  
PAINT LAGAO **FLOORPRO**



ABRASION  
RESISTANCE

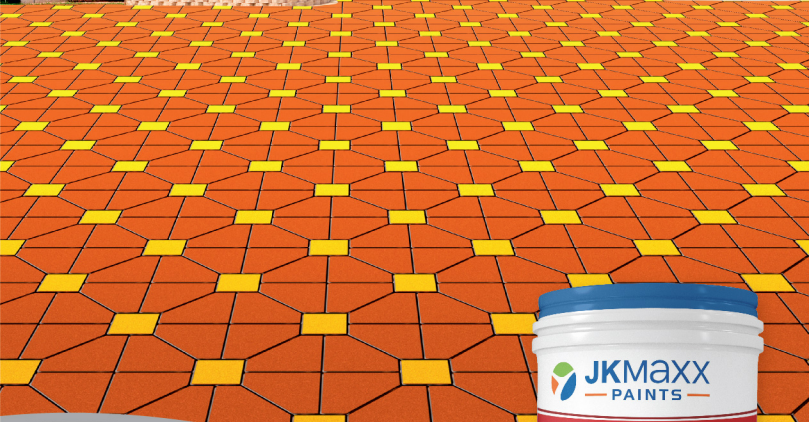

HIGH  
WASHABILITY

Available in 1L, 4L

# JK **ARMOUR**

## **FLOORPRO**

Floor Coat Emulsion



**JK Armour FloorPro** is a water based acrylic emulsion exclusively designed to protect interlock tiles, cement surfaces, walkways, driveways and terrace floors.

### Features



**ABRASION  
RESISTANCE**



**SOFT SHEEN**



**SUPERIOR  
ADHESION**




**HIGH  
WASHABILITY**


# Redefining Exteriors with Colour




**GOLDEN YELLOW**




**PAVER GREY**




**SIGNAL RED**



**TERRACOTTA**



**PEACOCK BLUE**



**FOREST GREEN**





-  **Signal Red**
-  **Golden Yellow**
-  **Forest Green**
-  **Peacock Blue**

# Directions For Use



## Surface Preparation

Freshly plastered/concrete surfaces must be allowed to cure completely for at least 12 weeks. Ensure surface is thoroughly clean, dry and free from all loose dirt, chalk, grease or oily material, laitance, organic debris, fungi, algae and flaking paint by brushing with a wire/stiff coir brush or power tool cleaning followed by water jetting if required and appropriate surface cleaners. For repainting surfaces ensure all the old coating should be removed, any cracks or crevices present should be filled with suitable filling compounds/cement sand mixture, any seepage/dampness issue needs to be arrested appropriately before application. After cleaning, sand the surface to remove any smoothness or glossy areas using wire brush or power tool sanding. Wash with fresh water and allow the surface to dry.



## Self-Priming Coat

Apply a self-priming coat of JK Armour FloorPro to the prepared surface by diluting with 30-40% clean water and allow it to dry for minimum 5-6 hours.



## Top Coat

Apply 2 coats of JK Armour FloorPro with maximum of 10% dilution over the self-priming coat and allow a drying time of 5-6 hours between the coats. Curing after 72 hours of application (low traffic).

JK Cement Ltd., Kamla Tower, Kanpur, UP - 208001

Email: [consumercare@jkmaxxpaints.com](mailto:consumercare@jkmaxxpaints.com) Toll-free No.: 1800 203 4555

[www.jkmaxxpaints.com](http://www.jkmaxxpaints.com)