

SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



PACKING

Available in 20 Ltr & 1 Ltr container packing.



PRECAUTION



Avoid application in temperature over 40°C and below 5°C and in strong winds. Wash all equipments with water immediately after use

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAJESTA Artiste VOGUE

Botticelli



JK MAJESTA
Artiste VOGUE

Botticelli
CONCRETE STONE

BOTTICELLI, a comprehensive design of casted, highlighted by soft natural grains. The natural grains break the symmetry in design where as the washed color adds to the richness in the finish. It gives a very subtle yet striking combinations. Available in many natural and earthy tones for both exterior and interior surfaces.



COMPOSITION



It is based on high performance Acrylic Resin with silicone, micro minerals, inorganic pigments, ceramics, quartz, siliceous minerals, special biocides, fungicides, algacides, surfactants etc.



COVERING CAPACITY

Botticelli cover approx. 4-5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.

Copotto Di Cemento covers approx. 150-180 sq.ft/ltr/coat.

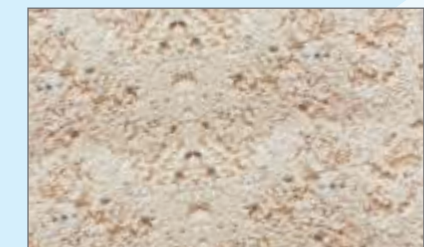

TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant



Excellent weather resistance



Good flexibility and adhesion



Algae & Fungus resistance



Breathes out trapped moisture



Water Repellent

APPLICATION

- Apply one coat of JK Primera on the surface to be painted.
- After complete drying of the sealer apply Botticelli with stainless steel trowel. Spread the material uniformly over the surface & make the texture pattern with trowel.
- After 24 hours drying, apply one coat of Copotto di cemento of required shade by brush /roller and wash it with sponge to make light dark finish.
- Apply a top coat of TC-100 A (Acrylic Top Coat) after 24 hours of complete drying for extra protection & gloss.

