

SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



PACKING

Available in 20 Ltr & 1 Ltr container packing.




PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

FINISH

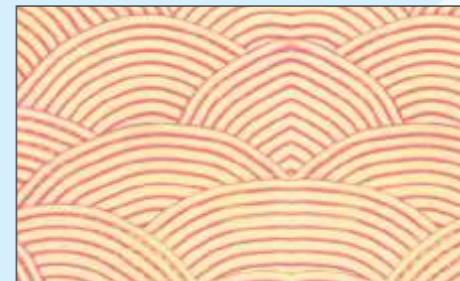

JK MAJESTA Artiste VOGUE

Decorika

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAJESTA
Artiste VOGUE

DECORIKA
MULTIEFFECT DESIGNER
INTERIOR FINISH

DECORIKA is a special multi effect designer finish. It transforms the wall with exotic metallic ,faux ,pearl effects. The use of different application tools like Tampon, sea sponge, Combing. Trowel, Wood tools etc.



COMPOSITION


It is based on high performance Acrylic Resin with silicone, micro minerals, inorganic pigments, ceramics, special pearl pigments, siliceous minerals, special biocides, fungicides, algacides, surfactants etc.



COVERAGE

SATENATO cover approx. 80-90 sq. ft./ ltr per coat depending on porosity of the surface.

DECORIKA cover approx. 90-100 sq. ft./ Kg per coat depending on the design pattern.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant



Bridges Hairline Cracks



Good flexibility and adhesion



Algae and Fungus Resistance



Breathes out trapped moisture



Water Repellent

APPLICATION

- a) Apply one coat of JK Primera of required shades on the surface to be painted.
- b) After complete drying of the primer apply Satenato of require shade by brush/roller .
- c) After 4 hours drying, apply Decorika with designer tools to create designer pattern

