

SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



PACKING

Available in 20 Ltr & 1 Ltr container packing.



PRECAUTION



Avoid application in temperature over 40°C and below 5°C and in strong winds. Wash all equipments with water immediately after use

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAJESTA Artiste VOGUE

Glitterati



JK MAJESTA
Artiste VOGUE

Glitterati
SHIMMERING FINISH

GLITTERATI, provides the silken feel in a shimmering paint finish. It has been extensively used by designers to provide luxurious feel. Glitterati provides myriad reflections. Available in myriad shades.



COMPOSITION


It is based on high performance Acrylic Resin with silicone, micro minerals, inorganic pigments, ceramics, quartz, siliceous minerals, special biocides, fungicides, algacides, surfactants etc.




COVERING CAPACITY

SATENATO cover approx. 80-90 sq. ft./ ltr per coat depending on porosity of the surface.

GLITTERATI cover approx. 90-100 sq. ft./ Ltr per coat depending on the texture .




FINISH

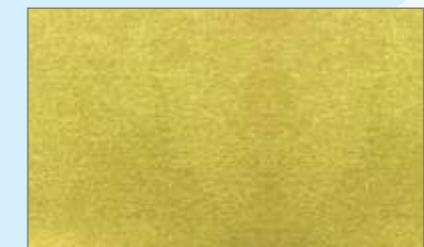

APPLICATION

- Apply one coat of JK Primera of required shades on the surface to be painted.
- After complete drying of the primer apply Satenato of require shade by brush/roller .
- After 4 hours drying, apply GLITTERATI by spray gun

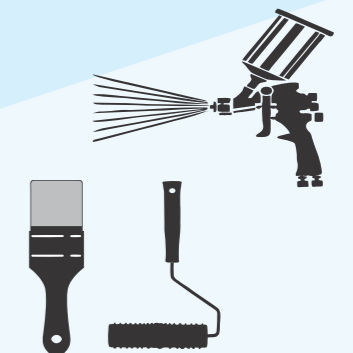

TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant



Algae & Fungus resistance



Good flexibility and adhesion



Breathes out trapped moisture



Bridges Hairline Cracks



Value for Money