


## SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algae and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfections should be mended with JK WallMaxX/JK Shield MaxX Putty.



## THINNING

Can be thinned with 4-6 % potable water as per requirement.



## PACKING

Available in 20 Kg & 30 Kg packing.



## STEPS OF APPLICATION

The priming coat should be of JK Primera Exterior primer in required shade. It can be thinned upto 50- 60% with tap water as per the porosity of the surface. Apply a one coat of JK Maximo Patternz Rock by spray gun.



## PRECAUTION



- Avoid application in too hot, strong winds and in high humidity.
- To avoid any joints do not stop in the middle of the wall.
- Wash all equipments with water immediately after use.
- Do not allow spilt material to enter drains or other water courses.
- Avoid application in temperature over 40°C and below 5°C and in direct sunlight.

## JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: [www.jkmaxxpaints.com](http://www.jkmaxxpaints.com)


Email Address: [consumercare@jkmaxxpaints.com](mailto:consumercare@jkmaxxpaints.com)

**JKMaxx**  
— PAINTS —  
Colours of joy

# JK MAXIMO Patternz **RockTex**

JK MAXX PATERNZ ROCK



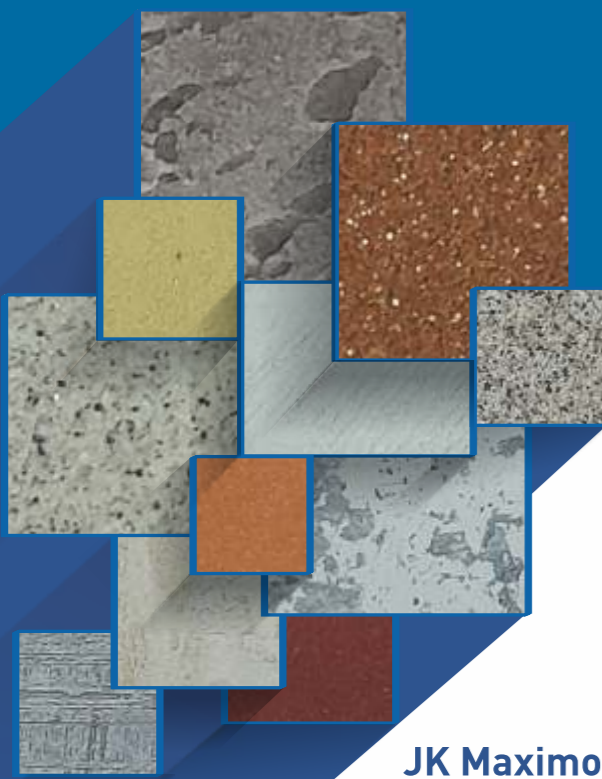

## JK MAXIMO Patternz RockTex

### JK Maximo Patternz Rock TEXTURED FINISH

**JK Maximo Patternz Rock** is a high performance textured wall finish. It is based on high performance Silicone Acrylic emulsions, Inorganic pigments, Siliceous minerals, Special biocides, Algicides, Fungicides, Surfactants etc. It is ideal for exteriors & interiors of the buildings. It has a long life and is easy to apply. JK Maximo Patternz Rock provide UNIQUE FEATURES so essential yet missing in conventional / look alike products



### COMPOSITION

It is based on high performance Acrylic Copolymers, In-organics pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



### FINISH

High Build Granular acrylic aggregate textured (semi rough starry, finish) wall coating in pigmented finish by spray gun .



### DRYING TIME

Hard Dry : 8 hours.



### COVERING CAPACITY

Approx. 3.8 - 4.5 sqft/kg/coat depending on the porosity of the surface.



### APPLICATION

Spray Gun



## TECHNICAL DATA

### TECHNICAL CHARACTERISTICS

JK Maximo Patternz Rock is a tinted granular textured wall finish for the protection and decoration in the exterior and interiors. It covers hairline cracks. It builds to a very durable exterior and interior finish.

