

SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty.



FINISH

Smooth orange peel effect with sponge, wool or stipple rollers.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

ACRO FINE



JK MAXIMO Patternz

JK Maximo Patternz - ACRO FINE
TEXTURED ROLLER STIPPLE FINISH

ACRO FINE is must for exterior and interior protection and decoration of all types of surfaces like cement sand plasters, gypsum, concrete, wood etc. It is environment friendly and water based.



APPLICATION AREA

Exterior and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 0.8 to 1.0 sq.mtr. per kg per coat, depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Weather and Natural Colour Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV resistant



Fire Retardant



Prolongs the life of the structure

APPLICATION

- JK Primera coat as Sealer / primer of required shade.
- Thin down ACRO FINE of required shade with 7-10 % potable water and apply it by sponge roller . Finish it with the help of stipple roller.




SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-8 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry, finish) wall coating in pigmented finish by spray gun.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

ACRO ROCK SPRAY



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

ACRO ROCK SPRAY
HIGH BUILD GRANULAR TEXTURED
WALL FINISH

ACRO ROCK SPRAY is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exterior and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments. Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides. Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 6.5-7.5 sq. ft. per kg. depending on the porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus Resistance



Breathes out trapped moisture



Water Repellent

APPLICATION

- JK Primera coat as Sealer / primer
- Spray the ACRO ROCK SPRAY by spray gun to get semi rough stary finish.



SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



FINISH

Bubble spray finish with spray gun.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

ACRO SPRAY DEWS



JK MAXIMO Patternz

Acro Spray Dews
BUBBLE SPRAY FINISH

ACROSPRAY DEWS is must for exterior and interior protection and decoration of all types of surfaces like cement sand plasters, gypsum, concrete, wood etc. bubble finish to take on the most adverse climatic conditions .It is environment friendly and water based.




COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 16-18 sq. ft. per kg per coat. depending on the porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Prolongs the life of the structure



Excellent weather resistance



Good flexibility and adhesion



Algae & Fungus Resistance



Light-fast UV resistance



Fire Retardant

APPLICATION

- JK Primera coat as Sealer / primer
- Thin down WALL SPRAY BASE with 4-5 % potable water and apply it by spray gun as bubble texture finish.
- After 12 hrs drying apply 2 coat of CERANOVA PRO/ROCK SHIELD of required shade with 40 % dilution by brush, roller or spray.



SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



FINISH

Bubble spray finish with spray gun.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

ACRO SPRAY FLAT



JK MAXIMO Patternz

ACRO Spray Flat
BUBBLE SPRAY FLAT FINISH

ACROSPRAY FLAT is must for exterior and interior protection and decoration of all types of surfaces like cement sand plasters, gypsum, concrete, wood etc. bubble finish to take on the most adverse climatic conditions. It is environment friendly and water based.



APPLICATION AREA

Exterior and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 16-18 sq. ft. per kg per coat. depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Prolongs the life of the structure



Excellent weather and natural colour resistance



Good flexibility and adhesion



Algae & Fungus Resistance



Light-fast UV resistance



Fire Retardant

APPLICATION

- JK Primera coat as Sealer / primer
- Thin down WALL SPRAY BASE with 4-5 % potable water and apply it by spray gun as bubble texture finish. After semi drying flatten the texture with roller
- After 12 hrs drying apply 2 coat of CERANOVA PRO/ROCK SHIELD of required shade with 40-45 % dilution by brush, roller or spray.
- After 24 hrs drying apply one coat of TC 100 A (Acrylic Dirt Resistant Top Coat) over the surface by brush /roller.



SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



MIXING OF PACKS


Mix Pack A with Pack B.

POT LIFE

Use Mixed paint within 60 minutes.

THINNER

Can be thinned with 4-6 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry, finish) wall coating in pigmented finish by spray gun.



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

AQUAPOXY 2K



JK MAXIMO Patternz

AQUAPOXY 2K
HIGH BUILD GRANULAR TEXTURED
WALL FINISH

AQUAPOXY 2K is based on high performance water borne Epoxy and special chemicals that form a unique matrix providing excellent water resistance, alkali resistance properties etc. it also retards algal and bacterial growth. it is highly recommended for concrete and Masonry of public places, hospitals, tunnels, Hotels etc.



APPLICATION AREA

Concrete and Masonry at public places. Hospitals, Tunnels, Air conditioning ducts and all areas requiring hygienic conditions.



COMPOSITION

It is based on high performance Epoxy Resin, Fungicides, Bactericides.



COVERAGE

Approx. 7-8 sq. mtrs per kg/ per coat. depending on the porosity of the surface.



DRYING TIME

Surface Dry: 5-6 hours.
Through Dry : 24-48 hrs
and as per the weather conditions.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent
Weather Resistance



highly recommended
for concrete and Masonry
of public places



Algae and
Fungus Resistance




Water Repellent

APPLICATION

On a duly primed surface apply the mixed pack of AQUAPOXY 2 K by Brush/Roller/Spray.

Apply 2nd coat after interval of 24 hrs. Protect the painted surface from the rain in the initial 48 hrs.

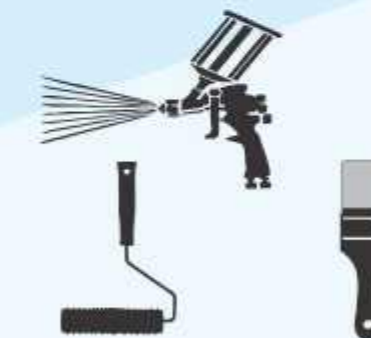


SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algae and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfection should be removed with the use of JK WallMaxX/JK ShieldMaxX Putty.



THINNING

Can be thinned with 2-3 % potable water as per requirement.



PRIMING

The priming coat should be of JK Primera Exterior primer. It can be thinned upto 50-60% with tap water as per the porosity of the surface.



SHADES

Shade can be achieved by painting 2 or more coats of our product JK Maximo Ultra Luxury Exterior Emulsion.



PACKING

Available in 30 kg sealed bag.



PRECAUTION



- Avoid application in too hot and strong winds and in high humidity.
- Wash all equipments with water immediately after use.
- Avoid application in temperature over 40°C and below 5°C and in direct sunlight.
- Do not allow split material to enter drains or other water courses.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxpaints.com
Email Address: consumercare@jkmaxpaints.com



JK MAXIMO Patternz

SPRAY BUBBLE





JK MAXIMO Patternz

JK Maximo Patternz
JK WALL SPRAY BUBBLE -TEX
TEXTURED WALL SPRAY FINISH

JK Maximo Patternz Bubble-Tex is a high performance textured wall finish. It is based on high performance Silicone Acrylic emulsions, Inorganic pigments, Siliceous minerals, Special biocides, Algicides, Fungicides, Surfactants etc. It is ideal for exteriors & interiors of the buildings. It has a long life and is easy to apply. JK Maximo Bubble-Tex provide **UNIQUE FEATURES** so essential yet missing in conventional / look alike products.



COMPOSITION

It is based on high performance Acrylic Resin, In-organics pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



FINISH

It is used to obtain a bubble effects with spray gun.



DRYING TIME

Hard Dry : Max 12 hours.



COVERING CAPACITY

Approx. 420-540 sqft/30kg/coat depending on the porosity and texture of the surface.



APPLICATION


By Spray



TECHNICAL DATA

TECHNICAL CHARACTERISTICS

Bubble-Tex is must for exterior and interior protection and decoration of all types of surfaces like Cement sand plasters, Stucco, Gypsum, Concrete, Wood, etc. vastly preferred by Specifiers and Builders for protection and decoration of substrates.

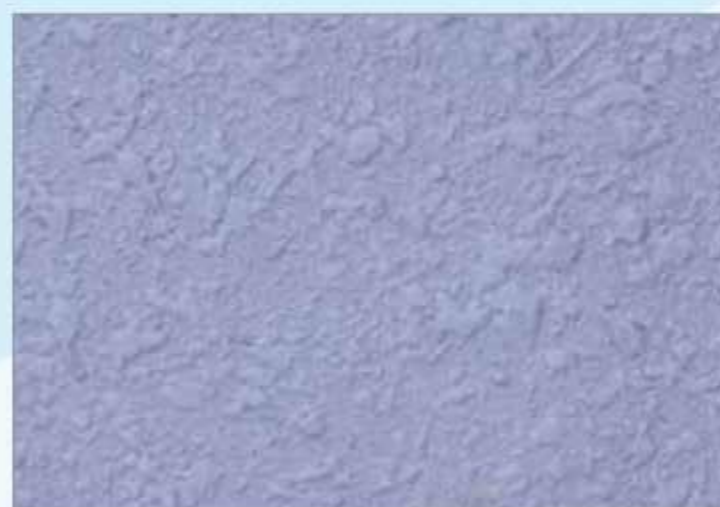

SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



COVERAGE

Approx. 6.5-7.5 sq. ft. per kg. depending on the porosity of the surface.

PACKING

Available in 20 Kg & 30 Kg packing.



THINNER

Can be thinned with 3-4% potable water as per requirement.



FINISH

Granular textured (rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

CRISTALLO



JK MAXIMO Patternz

Cristallo
GRANULAR TEXTURED WALL FINISH

CRISTALLO is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5 to 4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 12 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV resistant



Fire Retardant

APPLICATION

The Priming coat should be of JK Primera coat as Primer in required shade. It can be thinned upto 50-60 % with tap water as per the porosity of surface. Apply a one coat of CRISTALLO of required shade by trowel. Spread the material uniformly over the surface as a plaster and make the desired pattern with the help of Polystyrene Trowel.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

GRAFFIATO FINE



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

GRAFFIATO FINE

GRANULAR TEXTURED WALL FINISH

GRAFFIATO FINE is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.




COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5 to 4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



APPLICATION

The priming coat should be of JK Primera of required shade. It can be thinned upto 50-60 % with tap water as per the porosity of surface. Spread the material of GRAFFIATO FINE uniformly over the surface and make the pattern with the help of polystyrene trowel.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Breathes out trapped moisture



Water Repellent


SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 2-3 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

GRAFFIATO



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

ACRO GRAFFIATO
HIGH BUILD GRANULAR TEXTURED
WALL FINISH

ACRO GRAFFIATO is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5 to 4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent
Weather Resistance



Good flexibility
and adhesion



Algae and
Fungus resistance



Breathes out
trapped moisture



Water Repellent

APPLICATION

- JK Primera coat as Sealer / Primer
- Material application with s/s trowel & finished with polystyrene trowel.



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal & fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



PRECAUTION



- * Surface must not have undulations
- * To avoid any joints stop the work only at the corner
- * Don't stop in the middle of the wall, otherwise patches will come. Avoid application in too hot and strong winds and in high humidity
- * Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use
- * Freshly applied material should be protected from rain for minimum 48 hours

FINISH



PACKING

Available in 20 Kg & 30 Kg packing.



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

GRANIPLAST FINE



JK MAXIMO Patternz

Graniplast Fine
TEXTURED WALL FINISH WITH CERAMIC
& SILICONE

JK Maximo Patternz Graniplast fine provides a stone like finish which can take on all types of climatic conditions. It covers hairline cracks and takes on thermal expansions and contractions of the surface effectively. It builds to a very durable exterior and interior finish.



COMPOSITION

It is based on high performance Acrylic Resin with Silicone, In-organics pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides, Surfactants etc.



DILUTION

Diluted with water 4 - 8% as per application requirement



DRY FILM THICKNESS

1.0 to 1.5mm



COVERING CAPACITY

80-100 sq. ft. for 25 kg bag depends upon the surface condition porosity



APPLICATION

By Spray Gun



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Light-fast
UV resistance



Value for
Money



Fire Retardant



Bridges
Hairline Cracks



Water Repellent


SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-8 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

PERMA GRAFFIATO



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

PERMA GRAFFIATO
GRANULAR TEXTURED WALL FINISH

PERMA GRAFFIATO is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5 to 4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Breathes out trapped moisture



Water Repellent

APPLICATION

The priming coat should be of JK Primera of required shade. It can be thinned upto 50-60 % with tap water as per the porosity of surface. Spread the material of PERMA GRAFFIATO uniformly over the surface and make the pattern with the help of polystyrene trowel.



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

PERMA RUSTIC



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

PERMA RUSTIC
TEXTURED WALL FINISH

PERMA RUSTIC is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc.



COVERAGE

Approx. 5-6 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV resistant



Prolongs the life of the structure

APPLICATION

- JK Primera coat as Sealer / Primer of required shade
- Apply a one coat of PERMA RUSTIC of required shade by trowel, spread the material uniformly over the surface and make the desired pattern with the help of polystyrene trowel.



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

PERMA SCRATCH STONE



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

PERMA SCRATCH STONE GROOVED TEXTURED FINISH

PERMA SCRATCH STONE is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 4-5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Fire Retardant



Prolongs the life of the structure

APPLICATION

- JK Primera coat as Sealer / Primer of required shade.
- Spread the material of PERMA SCRATCH STONE with the help of trowel and make the desired pattern with the help of polystyrene trowel



SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty.



FINISH

Smooth orange peel effect with sponge, wool or stipple rollers.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

RHINO FINE



JK MAXIMO Patternz

RHINO FINE
TEXTURED ROLLER FINISH

RHINO FINE is must for exterior and interior protection and decoration of all types of surfaces like cement sand plasters, gypsum, concrete, wood etc. It is environment friendly and water based.



APPLICATION AREA

Exterior and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 8-9 sq. ft. per kg per coat. depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Light-fast
UV resistance



Weather and Natural
Colour Resistance



Good flexibility
and adhesion



Algae and
Fungus resistance



Fire Retardant



Prolongs the life
of the structure

APPLICATION

- JK Primera coat as Sealer / primer of required shade.
- Thin down **RHINO FINE** of required shade with 7-10 % potable water and apply it by sponge roller. Finish it with the help of stipple roller.



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

ROCKART



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

ROCKART
TEXTURED WALL FINISH

ROCKART is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 5.5-6.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Breathes out trapped moisture



Light-fast UV resistance

APPLICATION

- JK Primera coat as Sealer / Primer
- Material application with s/s trowel & finished with polystyrene trowel.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

RUSTIC FINE



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JK MAXIMO Patternz

Rustic Fine
TEXTURED WALL FINISH

RUSTIC REGULAR is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 4 - 5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Breathes out trapped moisture



Light-fast UV resistant

APPLICATION

- JK Primera coat as Sealer / Primer
- Material application with s/s trowel & finished with polystyrene trowel.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough stary finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

RUSTIC REGULAR



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

Rustic Regular
TEXTURED WALL FINISH

RUSTIC REGULAR is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5-4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



APPLICATION

- JK Primera coat as Sealer / Primer
- Material application with s/s trowel & finished with polystyrene trowel.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent
Weather Resistance



Good flexibility
and adhesion



Algae and
Fungus resistance



Breathes out
trapped moisture



Light-fast
UV resistant

SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

SCRATCH JUMBO



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

Scratch Jumbo
GROOVED TEXTURED FINISH

SCRATCH JUMBO is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.




COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 2.5-3.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



APPLICATION

- JK Primera coat as Sealer / Primer
- Material application with s/s trowel & finished with polystyrene trowel.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV Resistant



Fire Retardant


SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

SCRATCH STONE FINE



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

Scratch Stone Fine
GROOVED TEXTURED FINISH

SCRATCH STONE FINE is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 4-5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV Resistant



Fire Retardant

APPLICATION

- JK Primera coat as Sealer / Primer of required shade.
- Spread the material of SCRATCH STONE FINE with the help of trowel and make the desired pattern with the help of polystyrene trowel




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

SCRATCH STONE REGULAR



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com

Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

SCRATCH STONE REGULAR
GROOVED TEXTURED FINISH

PERMA SCRATCH STONE is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3-4 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Fire Retardant



Prolongs the life of the structure

APPLICATION

- JK Primera coat coat as Sealer / Primer of required shade.
- Spread the material of PERMA SCRATCH STONE with the help of trowel and make the desired pattern with the help of polystyrene trowel .



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

SCRATCH TUFF



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

SCRATCH TUFF GROOVED FINISH

SCRATCH TUFF is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algacides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3-4 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Fire Retardant



Prolongs the life of the structure

APPLICATION

- JK Primera coat as Sealer / Primer of required shade.
- Spread the material of SCRATCH TUFF with the help of trowel and make the desired pattern with the help of polystyrene trowel.



SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 2-3 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

FINISH



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

STUCCO VENEZIANO



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

STUCCO VENEZIANO SILK SMOOTH FINISH

STUCCO provides a smooth three dimensional finish to accentuate a royal aura. It is silk smooth to touch and provide an ancient painting like effect. It transforms sedate walls to a luxurious polished Italian marble look.



APPLICATION AREA

interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides. Algacides and Surfactants etc.



COVERAGE

Approx. 25-30 sq. ft. per kg. in 3 coats depending on the porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Three dimensional like finish in mirror gloss effect



Good Adhesion



Algae and Fungus resistance



Light-fast UV Resistant



Prolongs the life of the structure



Bridges Hairline Cracks

APPLICATION

- JK Primera coat as Sealer / primer of required shade.
- Apply the 1st coat of STUCCO of required shade by the stucco trowel as smooth plaster.
- apply the 2nd coat of stucco as patches with the help of stucco trowel
- After semi drying apply the thin layer of stucco in desired pattern and buff it with stucco trowel to finish it with mirror like gloss.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algae and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfections should be mended with JK WallMaxX / JK Shield MaxX Putty.



THINNING

Can be thinned with 5-7 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



STEPS OF APPLICATION

The priming coat should be of JK Primera Exterior primer in required shade. It can be thinned upto 50- 60% with tap water as per the porosity of the surface. Apply a coat of JK Maximo Patternz Superfine by brush /wool roller and make the desired pattern with with stipple/ pattern roller



PRECAUTION



- Avoid application in too hot, strong winds and in high humidity.
- To avoid any joints do not stop in the middle of the wall.
- Wash all equipments with water immediately after use.
- Do not allow spilt material to enter drains or other water courses.
- Avoid application in temperature over 40°C and below 5°C and in direct sunlight.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

SUPERFINE (ROLLER FINISH)





JK MAXIMO Patternz

JK Maximo Patternz Superfine
TEXTURED ROLLER / STIPPLE FINISH

JK Maximo Patternz Superfine is a high performance textured wall finish. It is based on high performance Silicone acrylic emulsions, inorganic pigments, siliceous minerals, Special biocides, algicides, fungicides, surfactants etc. It is ideal for exteriors & interiors of the buildings. It has a long life and is easy to apply. JK Maximo Patternz Superfine provide unique features so essential yet missing in conventional/ look alike products



TECHNICAL DATA


TECHNICAL CHARACTERISTICS

JK Maximo Patternz Superfine is must for exterior and interior protection and decoration of all types of surfaces like Cement sand plasters, Stucco, Gypsum, Concrete, Wood, etc. vastly preferred by specifiers and builders for protection and decoration of substrates.



COMPOSITION

It is based on high performance Acrylic Copolymers, Inorganics pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.

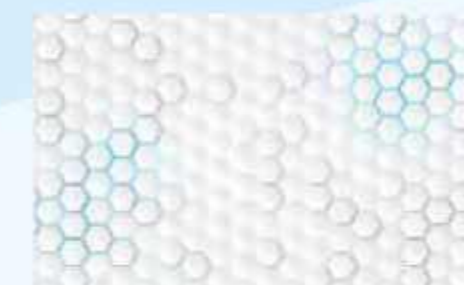

FINISH

Smooth orange peel effect with sponge, wool or stipple rollers and special effects with spray gun.



DRYING TIME

Hard Dry : Max 12 hours.



COVERING CAPACITY

Approx. 8-10 sqft/kg/coat depending on the porosity of the surface.



APPLICATION

By brush/ wool roller. Finishing by stipple / required roller.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 7-10 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.




PRECAUTION



- Avoid application in too hot and strong winds and in high humidity.
- Wash all equipments with water immediately after use.

FINISH

Smooth orange peel effect with sponge, wool or stipple rollers and special effects with spray gun.

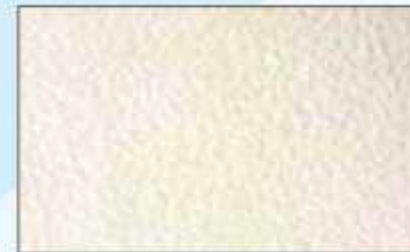

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

WALL PERMAFINE



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

Wall Permafine
TEXTURED WALL ROLLER / SPRAY FINISH

WALL PERMAFINE is must for exterior and interior protection and decoration of all types of surfaces like Cement sand plasters, Stucco , Gypsum, Concrete, Wood, etc. Vastly preferred by Specifiers and Builders for protection and decoration of substrates.



APPLICATION AREA

interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin, In-organics pigments, Ceramics, Quartz, Siliceous, Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 10-12 sq. ft. per kg. per coat depending on the CAPACITY porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.




TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



APPLICATION

By brush/ wool roller. Finishing by stipple / required roller.

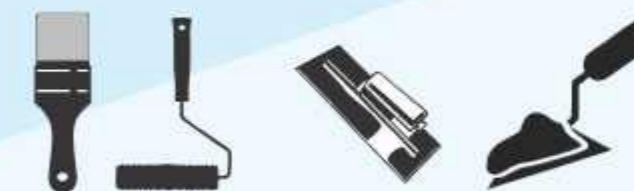


SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 21 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-8 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

WALL PERMA GRAFFIATO



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com



JK MAXIMO Patternz

Wall Perma Graffiato
GRANULAR TEXTURED WALL FINISH

WALL PERMA GRAFFIATO is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algicides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 3.5 to 4.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Breathes out trapped moisture



Water Repellent

APPLICATION

The priming coat should be of JK Primera of required shade. It can be thinned upto 50-60 % with tap water as per the porosity of surface. Spread the material of WALL PERMA GRAFFIATO uniformly over the surface and make the pattern with the help of polystyrene trowel.



SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.

FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

WALL PERMA ROCKART



JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JK MAXIMO Patternz

Wall Perma Rockart
TEXTURED WALL FINISH

WALL PERMA ROCKART is a tinted granular textured wall finish for the protection and decoration in the exteriors and interiors.



APPLICATION AREA

Exteriors and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, Wood, etc.




COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organic pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc.



COVERAGE

Approx. 5.5-6.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant.



Excellent
Weather Resistance



Good flexibility
and adhesion



Algae and
Fungus resistance



Light-fast
UV resistance



Prolongs the life
of the structure

APPLICATION

- JK Primera coat as Sealer / Primer of required shade
- Apply a one coat of WALL PERMA ROCKART of required shade by trowel, spread the material uniformly over the surface and make the desired pattern with the help of polystyrene trowel.




SURFACE PREPARATION

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-4 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



FINISH

High build granular acrylic aggregate textured (semi rough starry finish) wall coating in pigmented finish by S.S. trowel & finished with Polystyrene trowel.



PRECAUTION



- Surface must not have undulations
- To avoid any joints stop the work only at the corner
- Don't stop in the middle of the wall, otherwise patches will come
- Avoid application in too hot and strong winds and in high humidity
- Avoid application in temperature over 40°C and below 5°C and in direct sunlight
- Freshly applied material should be protected from rain for minimum 48 hours

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com
Email Address: consumercare@jkmaxxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

WALL PERMA RUSTIC FINE



JK MAXIMO Patternz

JK Maximo Patternz
WALL PERMA RUSTIC FINE
TEXTURED WALL TROWEL FINISH

WALL PERMA RUSTIC FINE provides a high build rock like finish in myriad shades. It covers hairline cracks and takes on normal expansions and contractions of the surface effectively. Build to a very durable exterior and interior finish.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, In-organics pigments, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides, and Surfactants etc.



COVERAGE

Approx. 4 - 5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



Alkali resistant



Excellent
Weather Resistance



Good flexibility
and adhesion



Algae and
Fungus resistance



Breathes out
trapped moisture



Light-fast
UV resistant

APPLICATION PROCEDURE

- * Firstly apply 1 coat of JK Primera on the surface to be painted
- * After 2 hours (minimum) of complete dry, use Polyplaster to level the surface imperfections
- * Give one more coat of JK Primera or touch up coat on the repair work (done with JK WallMaxx Putty)
- * After complete drying of the surface (min. 2 hours) apply WALL PERMA RUSTIC FINE with S/S trowel. Spread the material uniformly over the surface. To get the pattern / design of WALL PERMA RUSTIC FINE use Plastic Trowel/ Polystyrene Trowel




SURFACE PREPARATION

The surface should be dry clean and free dirt grease algal and fungal growth. New plastered surface should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



THINNER

Can be thinned with 3-8 % potable water as per requirement.



PACKING

Available in 20 Kg & 30 Kg packing.



PRECAUTION



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipment with water immediately after use.

JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001
Toll-free Number: 1800 203 4555 | Website: www.jkmaxpaints.com
Email Address: consumercare@jkmaxpaints.com

JKMaxx
— PAINTS —
Colours of joy

JK MAXIMO Patternz

WALL SPRAY



JK MAXIMO Patternz

WALL SPRAY
BUBBLE FINISH

WALL SPRAY is must for exterior and interior protection and decoration of all types of surfaces like cement sand plasters, gypsum, concrete, wood etc. bubble finish to take on the most adverse climatic conditions .It is environment friendly and water based.



APPLICATION AREA

Exterior and interior of cement sand plasters, Stucco, Concrete, Gypsum Boards, Bricks, wood. etc.



COMPOSITION

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides. Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



COVERAGE

Approx. 16-18 sq. ft. per kg per coat. depending on the porosity of the surface.



DRYING TIME

Hard Dry : 8 hours.



TECHNICAL DATA

PRODUCT BENEFITS/FEATURES



UV Resistant



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Fire Retardant



Prolongs the Life of the structure

APPLICATION

- JK Primera coat as Sealer / primer
- Thin down WALL SPRAY BASE with 4-5 % potable water and apply it by spray gun as bubble texture finish. gloss.

