
#### **SURFACE PREPARATION**

The surface should be dry, clean and free from dirt, grease, algal and fungal growth. New plastered surfaces should be allowed to cure for at least 28 days. Surface imperfection should be removed with the use of JK WallMaxx Putty as per directions.



#### **THINNER**

Can be thinned with 3-4 % potable water as per requirement.



# **PRECAUTION**



Avoid application in temperatures over 40°C and below 5°C and in strong winds. Wash all application equipments with water immediately after use.


#### **PACKING**

Available in 25 Kg & 30 Kg packing.



# **FINISH**


High build grooved texture finish by S.S. trowel & finished with Polystyrene trowel.



#### JK Cement Ltd.

Kamla Tower, Kanpur, UP - 208001

Toll-free Number: 1800 203 4555 | Website: www.jkmaxxpaints.com Email Address: consumercare@jkmaxxpaints.com

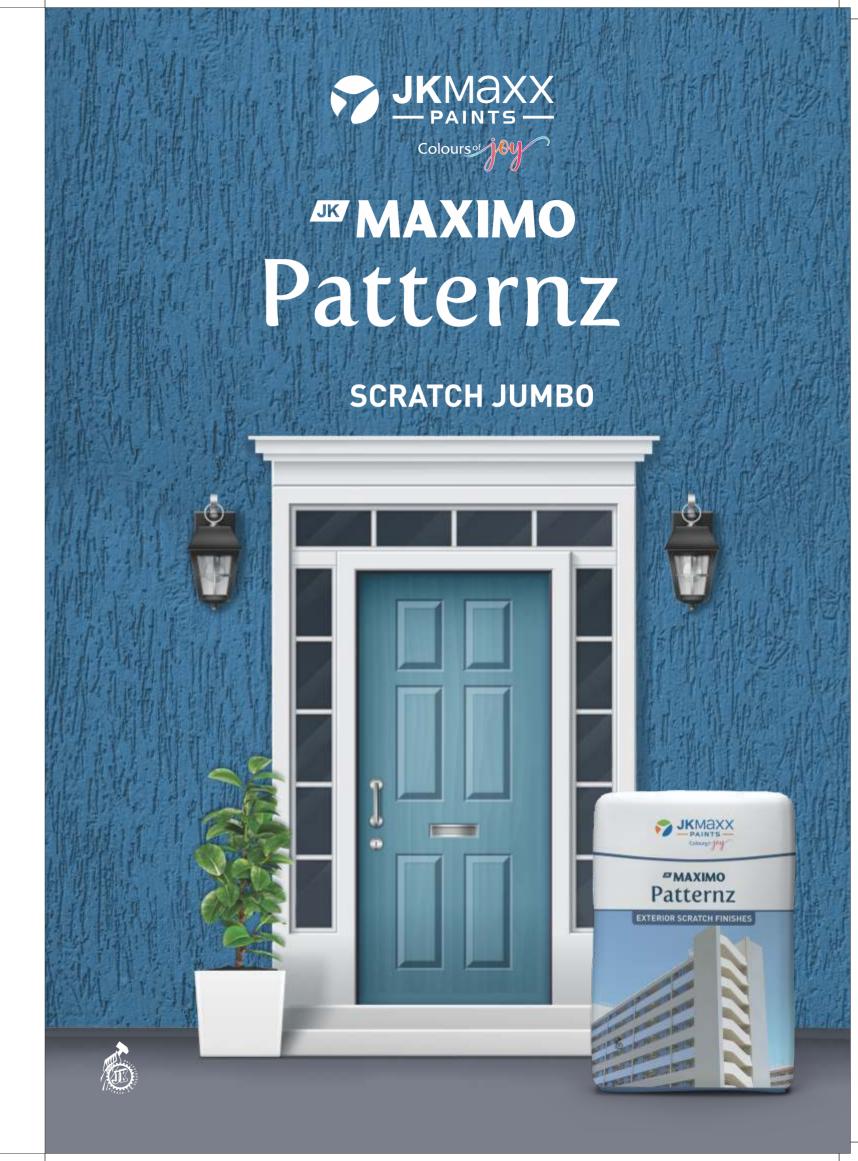







# MAXIMO Patternz

Scratch Jumbo
GROOVED TEXTURED FINISH

SCRATCH JUMBO is a non pigmented granular textured wall finish for the protection and decoration in the exteriors and interiors.



# **TECHNICAL DATA**

# PRODUCT BENEFITS/FEATURES



Alkali resistant



Excellent Weather Resistance



Good flexibility and adhesion



Algae and Fungus resistance



Light-fast UV Resistant



Fire Retardant

# **APPLICATION AREA**

Exteriors and interior of cement sand plasters, Stucoo, Concrete, Gypsum Boards, Bricks, Wood, etc.



# **COVERAGE**

Approx. 2.5-3.5 sq. ft./ kg. per coat depending on the texture and porosity of the surface.



# **COMPOSITION**

It is based on high performance Acrylic Resin with silicone, Ceramics, Quartz, Siliceous Minerals, Special Biocides, Fungicides, Algaecides and Surfactants etc. It is also recommended for reviving old buildings.



# **DRYING TIME**

Hard Dry : 8 hours.



# **APPLICATION**

- a) JK Primera coat as Sealer / Primer
- b) Material application with s/s trowel & finished with polystyrene trowel.

